

## FLOODLIGHTS

### Basic LED FL



#### Approximate Dimensions:

- Hight (30W): 247 mm
- Hight (50/70W): 280 mm
- Length (30W): 214 mm
- Length (50/70W): 244 mm

#### General Data:

##### Construction:

**Body** Die-cast aluminum alloy housing with a robust and refined finish coating

**Energy** 50% Lower energy consumption and longer lifespan (25 Khrs)

**IP Rating** IP65

##### Benefits:

**Performance** Excellent thermal management for stable performance  
Smooth appearance and durable

**Maintenance** Minimum maintenance cost

##### Typical

##### Applications:


- Ideal for outdoor lighting solutions** Landscape
- Cities
- Parking areas
- Highlighting outdoor areas



## FLOODLIGHTS

### Basic LED FL

#### Dimensional Drawing:

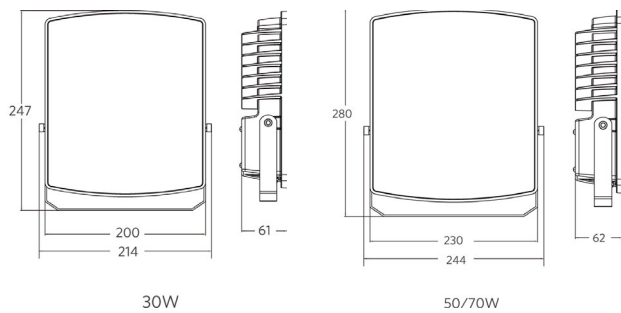


#### Specifications:


##### Technical Specifications:

<b>On/Off Cycles</b>	25 000
<b>Colour Consistency (SDCM)</b>	7
<b>Dimable</b>	No
<b>Finishing Colour</b>	Grey/Black
<b>IP</b>	IP65
<b>Driver Integrated (Yes/No)</b>	Yes
<b>Glow Wire Test</b>	650 °C
<b>Driver Failure Rate</b>	1 °C at 5 000 hrs
<b>Weight (kg/pc)</b>	1.54/2.58/2.58

#### Photometric Data:

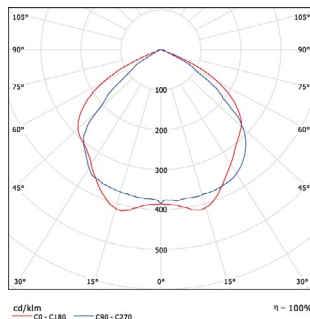

110° (30W)

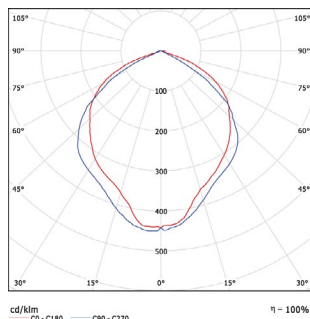

105° (50W,70W)

##### Electrical Supply:

<b>Frequency (Hz)</b>	50/60 Hz
<b>Voltage (V)</b>	220-240 V
<b>AC/DC</b>	AC

##### Mechanical Properties:

<b>Housing Material</b>	Die-cast Aluminium
<b>Optical Material</b>	Toughen Glass

##### Application Conditions:

<b>Operating Temperature</b>	-15 - + 40 °C
<b>Application Temperature</b>	25 °C
<b>Storage Environment</b>	-25 - + 50 °C

## FLOODLIGHTS

### Basic LED FL

#### Product Information:

Product Code	Luminaire Wattage	Lumens (LM)	Efficacy (lm/W)	Beam Angle	Lifetime	Weight (kg)
FL30WWGY	30W	1950	65	110°	25 000	1.82
FL30WCGY	30W	2000	67	110°	25 000	1.82
FL30WDGY	30W	2100	70	110°	25 000	1.82
FL30WWBK	30W	1950	65	110°	25 000	1.82
FL30WCBK	30W	2000	67	110°	25 000	1.82
FL30WDBK	30W	2100	70	110°	25 000	1.82
FL50WWGY	50W	3255	65	105°	25 000	2.88
FL50WCGY	50W	3350	67	105°	25 000	2.88
FL50WDGY	50W	3500	70	105°	25 000	2.88
FL50WWBK	50W	3255	65	105°	25 000	2.88
FL50WCBK	50W	3350	67	105°	25 000	2.88
FL50WDBK	50W	3500	70	105°	25 000	2.88
FL70WWGY	70W	4555	65	105°	25 000	2.88
FL70WCGY	70W	4750	68	105°	25 000	2.88
FL70WDGY	70W	4900	70	105°	25 000	2.88
FL70WWBK	70W	4555	65	105°	25 000	2.88
FL70WCBK	70W	4750	68	105°	25 000	2.88
FL70WDBK	70W	4900	70	105°	25 000	2.88

## Complete your Project:

Please select the items you require and we will be in touch

### Cables and Wires:

Indoor  
Outdoor  
General  
Other  
Let an ACTOM  
Specialist Contact you

### Lighting:

Indoor  
Outdoor  
General  
Other  
Let an ACTOM  
Specialist Contact you

### Transformers (Distribution):

Indoor  
Outdoor  
General  
Other  
Let an ACTOM  
Specialist Contact you

### Accessories:

Indoor  
Outdoor  
General  
Other  
Let an ACTOM  
Specialist Contact you

### Specific Information:

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400

## For more Information on this Product Please Send us the Following

### Product Information:

Product Name:

Quantity:

Project Name:

Date the Product is required:

### Your Contact Information:

Name and Surname:

Company:

Email:

Phone Number:

Province:

## Thank You

### For having a Look at this Product

Please send this PDF back to us with all your Information

Scan the QR Code to visit our Website:

