

TUBULAR FLUORESCENT LAMPS

Lumilux T5 HE and HO, Tubular, G5 Base

General Data:



Product Benefits:

Economical Up to 20 % more economical

than Lumilux T8

Size Up to 50 % smaller volume

than comparable T8 lamps

Lumilux T5 HE Good economy and efficiency

Lumilux T5 HO Excellent luminous flux

Typical Applications:

Lighting *Public buildings

*Office lighting

*Industry

*Tunnels, underpasses

*Supermarkets, department

stores and shops

*Street lighting

*Outdoor applications only in

suitable luminaires

Product Features:

Very Good Lumen 90% Throughout the Service

Maintenance: Lifetime of the Lamp Good Colour Rendering: 1B(Ra: 80...89)

Long Average Life: 24 000h

Dimmable

Colour Type:

	Sky White	Cool D	aylight	Daylight	Cool White		White Warn		White	INTERNA	Special Light Colours
Code:		865 6 500 K	965 5 400K	954 5 400K	840 4 000K	940 4 000K	835 3 500K	830 3 000K	830 3 000K	827 2 700K	



Technical Information and Photographs from OSRAM Selected Information has been Edited by ACTOM Electrical Products

Email: aep.enguiries@actom.co.za


Tel: +27 11 878 3050

Website: www.actomep.co.za



TUBULAR FLUORESCENT LAMPS

Lumilux T5 HE and HO, Tubular, G5 Base

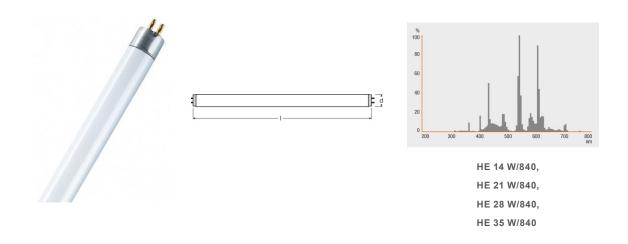

Product Information on Lumilux T5 HE:

Product Description	W	V	Length with Base (excl.Base Pins)	Diameter	Lumen at 25°C	ССТ	CRI	Rated Ave Life	EEC
			(mm)	(mm)	(lm)	(K)	(Ra)	(h)	
HE 14 W/840, 2FT (code:56096G/ECO)	14	240	549	16	1 200	4 000	≥ 80	24 000	A+
HE 21 W/840, 3FT (code:56099G/ECO)	21	240	849	16	1 900	4 000	≥ 80	24 000	A+
HE 28 W/840, 4FT (code:56097G/ECO)	28	240	1 149	16	2 600	4 000	≥ 80	24 000	A+
HE 35 W/840, 5FT (code:56094G)	35	240	1 449	16	3 320	4 000	≥ 80	24 000	A+



Technical Information and Photographs from OSRAM Selected Information has been Edited by ACTOM Electrical Products

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400

Email: aep.enquiries@actom.co.za


Tel: +27 11 878 3050

Website: www.actomep.co.za



TUBULAR FLUORESCENT LAMPS

Lumilux T5 HE and HO, Tubular, G5 Base

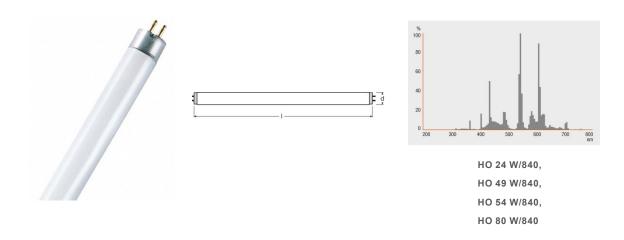

Product Information on Lumilux T5 HO:

Product Description	W	V	Length with Base (excl.Base Pins)	Diameter	Lumen at 25°C	CCT	CRI	Rated Ave Life	EEC
			(mm)	(mm)	(lm)	(K)	(Ra)	(h)	
HO 24 W/840, 2FT (code:56102G)	24	240	549	16	1750	4 000	≥ 80	24 000	Α
HO 49 W/840, 5FT (code:56106G)	49	240	1449	16	4310	4 000	≥ 80	24 000	A+
HO 54 W/840, 4FT (code:56103G)	54	240	1149	16	4450	4 000	≥ 80	24 000	A+
H0 80 W/840, 5FT (code:56104G)	80	240	1449	16	7000	4 000	≥ 80	24 000	Α



Technical Information and Photographs from OSRAM Selected Information has been Edited by ACTOM Electrical Products

Address: 4 Branch Road, Germiston 1401, P.O. Box 678, Germiston 1400

Email: aep.enquiries@actom.co.za

Tel: +27 11 878 3050

Website: www.actomep.co.za



Complete your Project:

Please select the items you require and we will be in touch

Cables and Wires: Lighting:

Indoor
Outdoor
General
Other
Other

Let an ACTOM Let an ACTOM

Specialist Contact you Specialist Contact you

Transformers (Distribution):

Indoor Indoor
Outdoor Outdoor
General General
Other Other

Accessories:

Let an ACTOM Let an ACTOM

Specialist Contact you Specialist Contact you

Specific Information:

Email: aep.enquiries@actom.co.za Tel: +27 11 878 3050 Website: www.actomep.co.za



For more Information on this Product Please Send us the Folowing

Product Information:	
Product Name:	
Quantity:	
Project Name:	
Date the Product is required:	
Your Contact Information:	
Name and Surname:	
Company:	
Email:	
Phone Number:	

Province:

Thank You

For having a Look at this Product

Please send this PDF back to us with all your Information



Scan the QR Code to visit our Website: